




FIG. 2

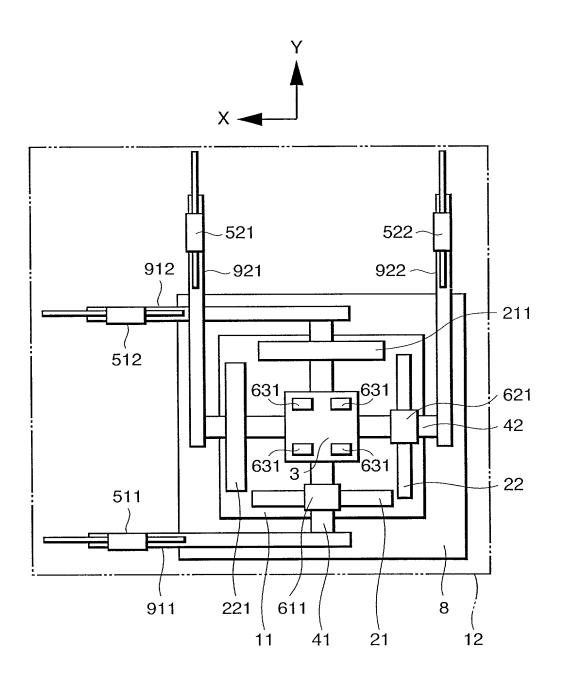

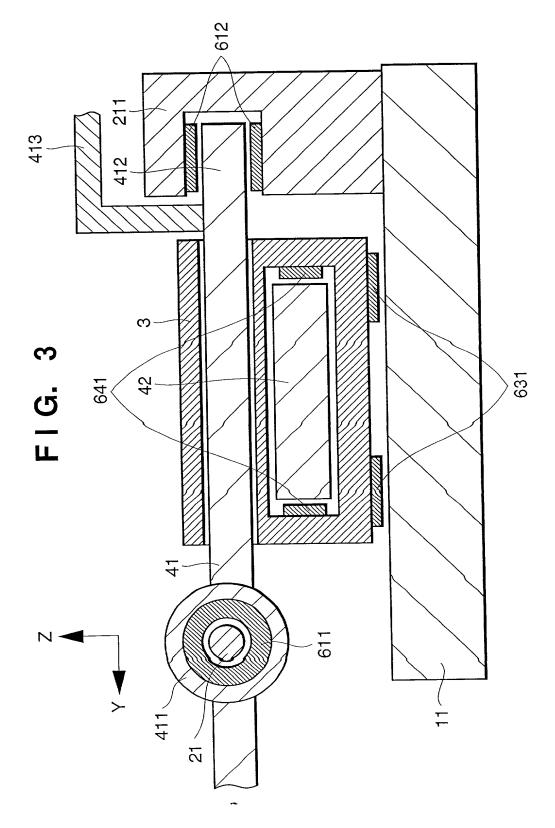

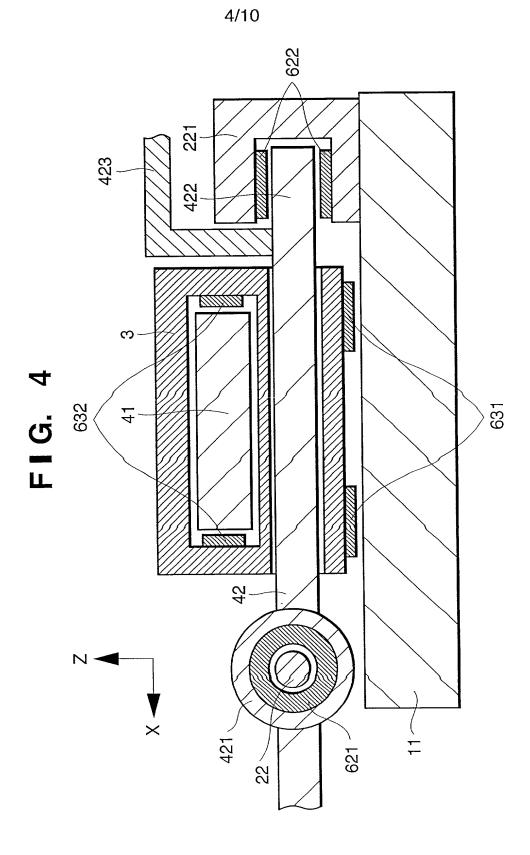

ACCULT GAGE

FIG. 5

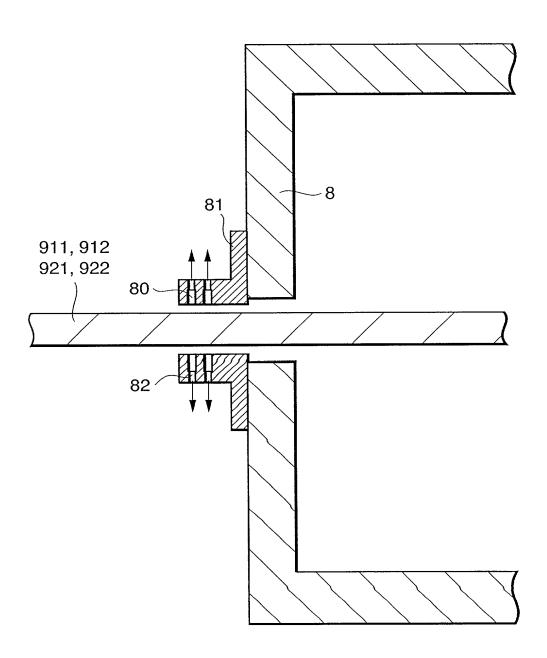


FIG. 6


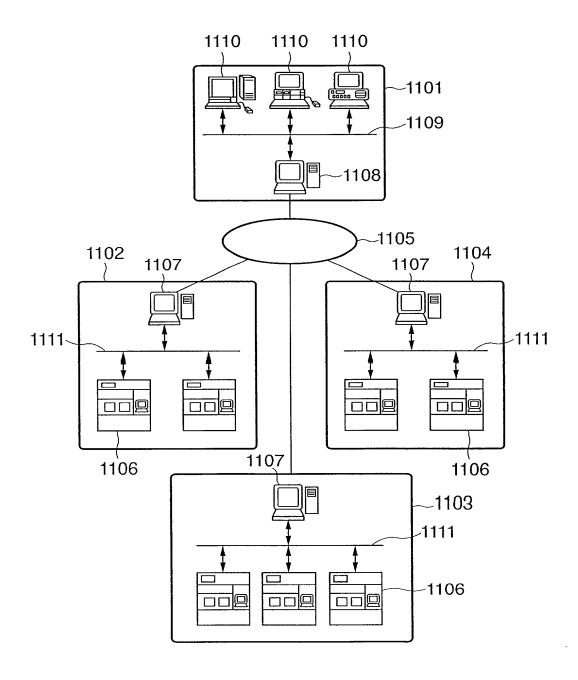


FIG. 7

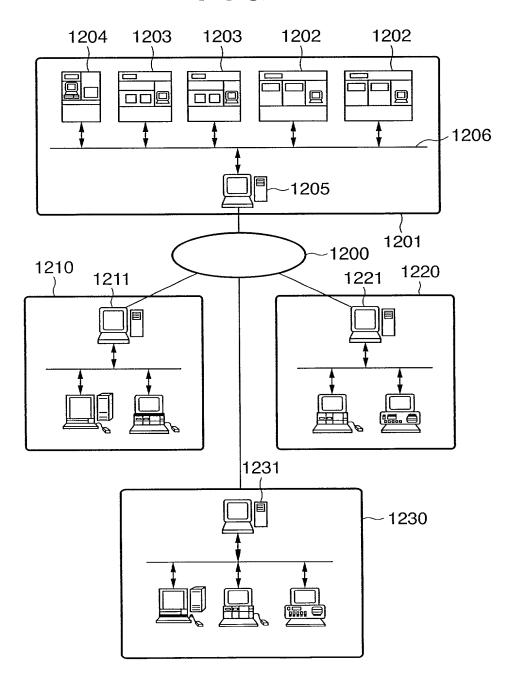


1 . . . r

## FIG. 8

URL http://www.maintain.co.jp/db/input.html	
TROUBLE DB INPUT WINDOW	
OCCURRENCE DATE 2000/3/15 ~ 1404  TYPE OF APPARATUS ******* 1401	
OBJECT OPERATION ERROR (START-UP ERROR) ~1403	
DEVICE S/N 465NS4580001 ~1402	
DEGREE OF URGENCY D ~ 1405	
SYMPTOM	LED KEEPS FLICKERING AFTER POWER ON
REMEDY	POWER ON AGAIN (PRESS RED BUTTON IN ACTIVATION) 2 1407
PROGRESS	<b>       </b> 1408
SEND (RESET) 1410 1411 1412	
LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATION GUIDE	

2.5


## FIG. 9

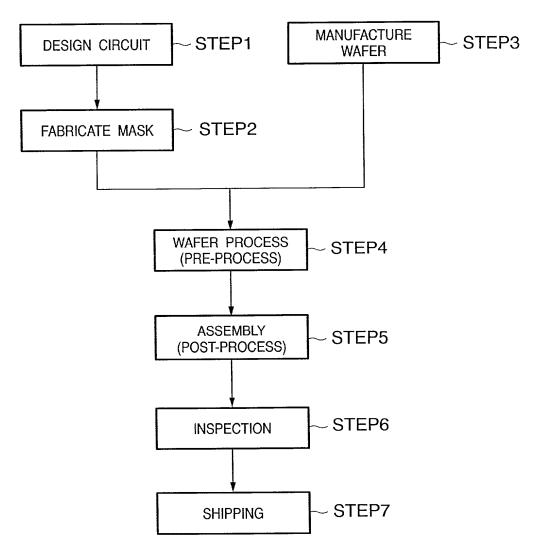

SEMICONDUCTOR DEVICE MANUFACTURING FLOW

4.

## FIG. 10

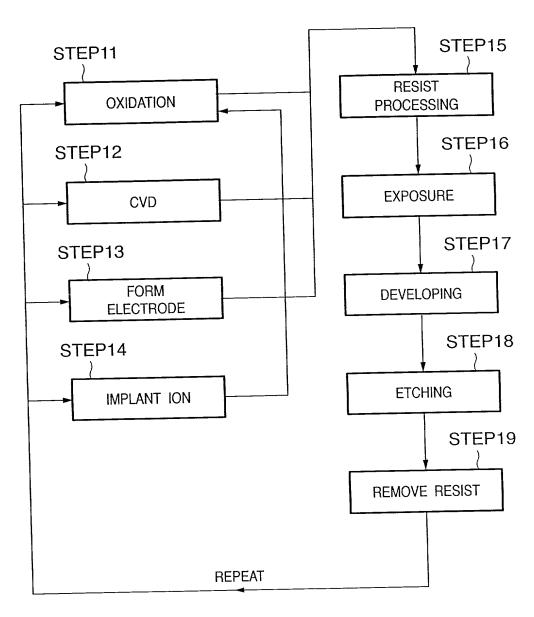

WAFER PROCESS